

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number
WO 03/061532 A1

(51) International Patent Classification⁷: A61F 2/32

(21) International Application Number: PCT/GB03/00157

(22) International Filing Date: 16 January 2003 (16.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0200993.4 17 January 2002 (17.01.2002) GB

(71) Applicant (for all designated States except US): **DEPUY INTERNATIONAL LIMITED** [GB/GB]; St Anthony's Road, Beeston, Leeds LS11 8DT (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FARRAR, Richard** [GB/GB]; Hall Green Farmhouse, Hall Green Lane, North Ripton LS17 0DW (GB).

(74) Agent: **BELCHER, Simon, James**; Urquhart-Dykes & Lord, Tower House, Merrion Way, Leeds LS2 8PA (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MANUFACTURING A COMPONENT WITH A NEAR SPHERICAL SURFACE

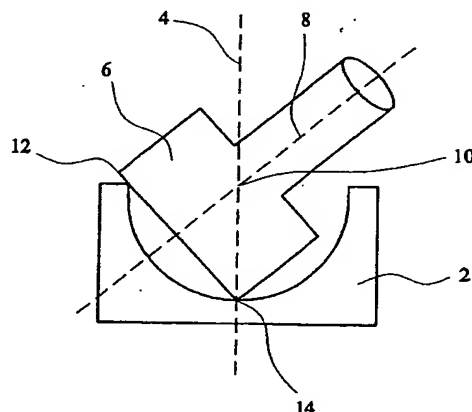

(57) Abstract: A method of making a component (2) of an orthopaedic joint prosthesis, which has a bearing surface whose shape corresponds approximately to a part of a sphere and is symmetrical about its polar axis, involves use of a cutting tool (6) which has a circular cutting edge (12) and which can be rotated about an axis (8) which is perpendicular to the plane containing the said cutting edge (12). The method involves (a) rotating the component about its polar axis (4) and rotating the cutting tool (6) about its axis (8), with the cutting edge (12) of the cutting tool (6) in contact with the surface of the component (2); (b) moving the cutting tool (i) in a direction parallel to the polar axis (4) of the component (2) while leaving the angle between the axis of the cutting tool (6) and the polar axis of the component (2) unchanged, and (ii) along its axis (8); and (c) repeating step (a). The movements (i) and (ii) of the cutting tool (6) cause the radius of curvature of the bearing surface to change continuously and monotonically as the angle between the radius and the polar axis of the component changes, so that the shape of the bearing surface deviates from that of a true sphere in such a way that discontinuities in the shape of the bearing surface as a result of individual movements are minimised.

WO 03/061532 A1